




# CONTI® SYNCHROFORCE CXA

Heavy-duty timing belts for sustained transmission of higher torque levels at low speed

## Properties:

- temperature range, depending on application, from -20°C to +100°C
- electrically conductive to ISO 9563
- conditionally resistant to oil
- ozone-resistant
- suitable for tropical climates
- aging-resistant
- suited for counterbending/back-tensioners
- maintenance free

## Belt structure:

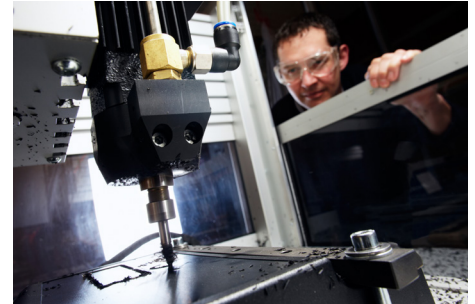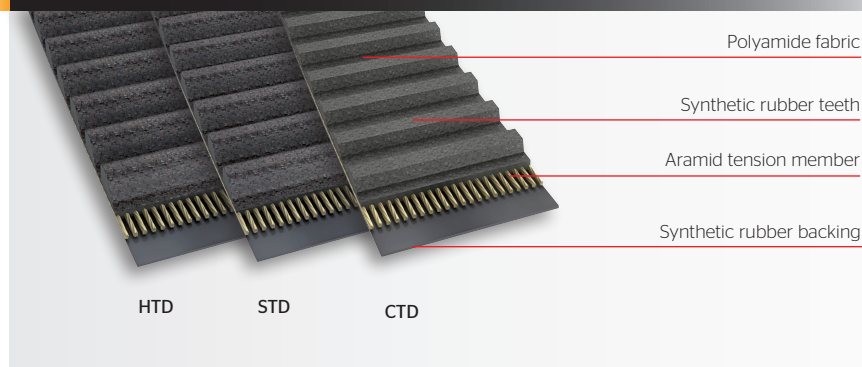

## HTD

Profile	Length range L <sub>p</sub> (mm)
HTD 8M CXA	288 - 3808
HTD 14M CXA	966 - 4578

## STD

Profile	Length range L <sub>p</sub> (mm)
STD S8M CXA	440 - 2848

## CTD

Profile	Length range L <sub>p</sub> (mm)
CTD C8M CXA	288 - 1600

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/disclosure](http://www.contitech.de/disclosure)

## Power Transmission Group

ContiTech Antriebssysteme GmbH  
D-30169 Hannover · Phone +49 511 938 - 71  
[industrie.as@ptg.contitech.de](mailto:industrie.as@ptg.contitech.de)

**ContiTech**